



IRONBULL®



**2026
TRAILERS**



**DURABILITY
MEETS
AFFORDABILITY™**

TABLE OF CONTENTS



IRONBULL
A NEW BREED OF TRAILERS

Iron Clad Warranty and Roadside Assistance	3
Dump Trailers	
DTB Model 7k-21k Dual 6" I-Beam Bumper Dump Trailer	8-9
DWB14 Model 14k 8" I-Beam Frame Dump Trailer	10-11
DTG14 Model 14k-21k Gooseneck Dump Trailer	12-13
DDP14 Model 14k-21k 96" Wide Deckover Bumper Pull Trailer	14-15
DDG14 Model 14k-21k 96" Wide Deckover Gooseneck Dump Trailer	16-17
DMG22 Model 22k 102" Wide Tandem Dual Dump Trailer	18-19
DHG22 Model 12" I Beam Gooseneck Dump Trailer	20-21
DBG14 Model 14k Gooseneck Roll Off Dump Trailer	22-23
DCB14 Model 14k General Duty Dump Trailer	24-25
DCB3K Model 3.5k Single Axle Dump Trailer	26-27
Equipment Trailers	
ETB Model 10k-21k 6" Channel Equipment Bumper Pull Trailer	30-31
EWB14 Model 14k 8" I-Beam Equipment Bumper Pull Trailer	32-33
ETG21 Model 14k-22k Channel Equipment Gooseneck Trailer	34-35
EBH22 Model 22k Equipment Bumper Pull Trailer	36-37
EHG22 Model 22k Equipment Gooseneck Trailer	38-39
HD Deckover Gooseneck and Pintle Trailers	
FLG22 Model 22k Gooseneck Low-Pro Equipment Trailer	42-43
FHG22 Model 22k Gooseneck Low-Pro Hydraulic Dove Trailer	44-45
FDG14 Model 14k 10" I-Beam Deckover Gooseneck Trailer	46-47
FDP14 Model 14k 10" I-Beam Pintle Equipment Trailer	48-49
FTG14 Model 14k 12" I-Beam Deckover Gooseneck Trailer	50-51
FLP22 Model 22k Deckover Pintle Trailer	52-53
FLP50 Model Super HD Pintle Trailer	54-55
FXG22 Model 22k Tandem Dual Deckover Trailer	56-57
Tilt Trailers	
TWB14 Model Mini-Beam Tilt Trailer	60-61
TLB14 Model 10k-21k Low-Pro Bumper Pull Tilt Trailer	62-63
TDP14 Model 14k Deckover Tilt Pintle Trailer	64-65
TSB07 Model 7k Gravity Tilt Bumper Pull Trailer	66-67
TRB Model 7k-10k Bumper Pull Tilt Trailer	68-69
THG22 Model 22k 12" I-Beam Gooseneck Tilt Trailer	70-71
Utility Trailers	
UTB03 Model 3.5k Single Axle Utility Trailer	74
UTB07 Model 7k Tandem Axle Utility Trailer	75



The North American Trailer Dealers Association is a professional business association in North America that serves the light and medium duty trailer dealers and brings them together as a unified team. For years, the trailer industry has struggled hard and waited patiently to gain financial strength, professional credibility and industry recognition. Now, the wait is finally over! By uniting the trailer dealers within a professional business association, NATDA is able to provide dealers with only the very best benefits, programs and education available.



The NATM Compliance Verification Program (CVP) is a mandatory program for all NATM member trailer manufacturers. This program involves multiple components, all of which are geared toward creating safer trailers and in turn, safer roadways. All NATM trailer manufacturer members are required to successfully complete a compliance consultation. Once a member has done so, they are able to purchase and place NATM Compliance Decals on their trailers.

IRON CLAD WARRANTY

BEST IN CLASS TRAILER ✓
BEST IN CLASS WARRANTY ✓
FREE ROADSIDE ASSISTANCE ✓

Let's Roll



Iron Bull trailers are some of the best in the market, and we are happy to provide our industry-best IronClad Warranty to back them up. Our manufacturer's warranty program covers structure and components, and even adds free 24-hour roadside assistance to every trailer standard. No service contracts, no hoops to jump through, and no hassles, just take your Iron Bull Trailer to any authorized dealer for fast and friendly service.

3 YEAR
Structural Coverage

2 YEAR
Component Coverage

2 YEAR
Free Roadside Assistance

Your Iron Bull trailer is warrantied to be free from structural defects for a period three years from the date of purchase.

This protection warrants every component (non-structural items) on your Iron Bull trailer to be free from defects for a period of two years from the date of purchase.

Each Iron Bull trailer is covered by a nationwide 24/7 roadside assistance program with benefits extending to the tow vehicle.

Roadside Assistance Details:

Each Iron Bull trailer is covered for a period of two years from the date of purchase with a free roadside assistance package. Benefits include:

- Flat Tire Changes
- Towing and Road Service (tow vehicle and trailer)
- Jump Starting
- Fluid Delivery (including fuel, hydraulic & coolant)
- Lock Out Service
- On the road and off road coverage
- Consumer and commercial coverage
- All benefits extend to the tow vehicle
- Included free on every Iron Bull Trailer

The program is simple to use:

- 1) Register your new Iron Bull trailer online at www.norstarwarranty.com
- 2) Have the last 8 digits of your VIN available (found on trailer).
- 3) Call our toll-free **24/7** dispatch line at **1-888-399-0327**
A dispatcher will assist in locating a service provider.

Roadside: 1-888-399-0327

For full warranty details please refer to your owner's manual or visit <https://norstarcompany.com/warranty#resources>

WHERE DURABILITY MEETS AFFORDABILITY



DUMP TRAILERS

OUR DUMP TRAILERS ARE BUILT TOUGH TO HANDLE ANY JOB YOU THROW AT THEM.

Designed with reinforced steel beds and high-capacity hydraulics, these trailers make heavy-duty hauling and dumping a breeze. Whether you're moving construction debris, landscaping materials, or farm loads, our reliable and efficient dump trailers provide unmatched durability and performance. Get the job done faster, safer, and with confidence.



Pg. 8



Pg. 10



Pg. 12

DTB

14k Dual 6" I-Beam Frame

- 10-16' Lengths
- Up to 21,000 lbs GVWR

DWB14

14k Mono 8" I-Beam Frame

- 12-16' Lengths
- 14,999 lbs GVWR

DTG14

14k Gooseneck

- 12-16' Lengths
- Up to 21,000 lbs GVWR



Pg. 14



Pg. 18



Pg. 22

DDP14

14k Deckover Bumper Pull

- 14-16' Lengths
- Up to 21,000 lbs GVWR

DMG22

Tandem Dual Deckover

- 20' Length
- Up to 24,900 lbs GVWR

DBG14

14k Roll-Off

- 14-20' Lengths
- 14,000 lbs GVWR



MORE THAN JUST A RAIL™

Ironbull has elevated dump trailers with a redesigned Side Armor™ system. This upgraded sidewall design keeps our 24-inch, 10-gauge original construction, featuring an oversized break preventing bowing and ensuring unmatched side rigidity. Enhanced Side Armor™ introduces a fully enclosed top rail made of 10-gauge steel to safeguard against potential damage during side loading. Corner reinforcements have also been strengthened offering additional welding area to reinforce the dump box. With this advanced Side Armor™ system, 7 gauge flooring, and available bed runners, every Ironbull dump trailer boasts an industry-leading dump box, allowing you to concentrate on your tasks with confidence.



CHOOSING THE RIGHT DUMP TRAILER

The right dump trailer will not only meet your hauling needs, but it will also have the durability, capacity, and features necessary to handle the types of loads you typically work with. Dump trailers are essential for anyone in the construction, landscaping, or farming industry. They provide a reliable way to transport heavy materials or equipment, making them indispensable to any work site. Selecting the right dump trailer requires consideration of several key factors. Consider the size and weight of the loads you will be hauling. Determining the size and weight helps you choose a trailer with an appropriate payload capacity. Think about the type of material you will be hauling. Certain materials may require a specific type of dump trailer, such as one with a high-sided design or a low-profile model. Evaluate the terrain you will be driving on. A dump trailer with a heavy-duty suspension system may be necessary if you go on rough terrain. Look for features that will make loading and unloading more accessible, such as a hydraulic lift system or removable sides - saving you time and effort when using the trailer. Choose a trailer compatible with your vehicle - ensure the trailer's hitching system is compatible with your vehicle's hitch receiver.

BEST SELLERS



DTB

14k Dual 6" I-Beam Frame

- 24" Side Armor™ Body Design
- 10' - 16' Lengths
- Up to 21,000 lbs GVWR
- 7 Gauge Flooring
- 6" I-Beam Frame
- 10ga 18" or 24" Steel Sides
- Slide-In Aluminum Ramps
- 32" Deck Height



DWB

14k Mono 8" I-Beam Frame

- 24" Side Armor™ Body Design
- 12' - 16' Lengths
- 14,999 lbs GVWR
- 7 Gauge Flooring
- 8" I-Beam Frame
- 10ga 18" or 24" Steel Sides
- Slide-In Aluminum Ramps
- 29" Deck Height



DCB

14k General Duty Dump

- 10' - 16' Lengths
- 14,000 lbs GVWR
- 10 Gauge Flooring
- 18" 10 Ga Dump Sides
- Barn Door Gate
- Slide-In Ramps
- 26" Deck Height



DTG

14k Gooseneck

- 24" Side Armor™ Body Design
- 12 - 16' Lengths
- 14,999 lbs GVWR
- 7 Gauge Flooring
- 12" I-Beam Neck & Risers
- 3-Way Spreader Gate
- Slide-In Aluminum Ramps
- 32" Deck Height



DMG

Tandem Dual Deckover

- 20' Length
- Up to 24,900 lbs GVWR
- 7 Gauge Flooring
- 12" I-Beam Frame, Neck & Risers
- Square Bottom Floor
- 48" 10ga Dump Sides
- Heavy Duty Slide-In Ramps
- 37" Deck Height



DBG

14k Roll-Off

- 14 - 20' Lengths
- 14,000 lbs GVWR
- Up to 20.7 Cu Yds Box Capacity
- Stackable Bins
- Full Front Toolbox
- 48" 10ga Dump Sides
- 20k Winch w Cable
- 34" Deck Height

DTB MODEL

Dual 6" I-Beam Dump Trailer



IRONBULL

A NEW BREED OF TRAILERS



Strength where strength matters! Featuring the Side Armor™ body design, every DTB sits atop of a dual layer of 6" I-beam weighing in at 12 pounds per ft main frame construction. That's 24 lbs/ft of pure steel, putting maximum strength into the most critical part of your trailering system. Our 83" wide 14k bumper pull is by far our most popular model. With two 7k axles and tons of standard features, this model is a perfect fit for the contractor or weekend warrior.



BOX CAPACITY (CUBIC YARDS)				
SIZE	BASE	3FT.	4FT.	
60x10	2.8			
72x10	4.4			
72x12	5.3	8.0	10.7	
83x12	6.2	9.2	12.3	
83x14	7.2	10.8	14.3	
83x16	8.3	12.3	16.4	

60" - 83" _____ **10' - 16'** _____ **9.9k - 21k lbs** _____ **6,869 - 14,122 lbs**
Bed Width Bed Lengths GVWR Load Capacity

STANDARD FEATURES

- Side Armor™ Body Design
- ST235/80R16 Radial Tires
- Reinforced Top Rail
- Toolbox & Front Jack Bracket
- Dual 6" I-Beam Frame (24lbs/ft)
- 7 Gauge Steel Flooring on 83" Wide Models
- 4" Tubing Bed Frame
- Full Length Bed Runners & Ramp Pockets
- 10 Gauge 18" or 24" Steel Sides
- Standard Retractable Tarp Kit
- 10k Drop-Leg Jack
- 2 5/16" Adjustable Auto Latching Coupler
- 2 - 7k Cambered Brake Axles (8k & Triple 7 Available)
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Spare Tire Mount
- Slide-in Aluminum Ramps
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powder Coat & Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 1/2" D-Rings
- DOT Approved Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug w/ Adapter
- 32" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM



BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	SIDES	WEIGHT
60	10	9,990	2 x 5,200 lb	225/75R16 6 Hole	18"	2,800
72	10	9,990	2 x 5,200 lb	225/75R16 6 Hole	24"	3,682
72	12	9,990	2 x 5,200 lb	225/75R16 6 Hole	24"	4,057
72	12	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	4,149
83	12	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	4,629
83	14	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	4,960
83	16	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	5,373
83	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	24"	5,373

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



Full Length Bed Runners



Aluminum Ramps



Side Armor™ System

DTB OPTIONAL FEATURES

CODE	DESCRIPTION
V53	3 Stage Telescopic Cylinder
082	Tandem 8k Axles
S01	Rear Support Stands
S61	3' Side Walls
S62	4' Side Walls
S90	Solar Panel Charger
R90	Wireless Remote
J58	Hydraulic 12k Jack
T82	Mechanical Pro Tarp Kit
W91	Cold Weather Harness (-85°F to 221°F Rated)



WHERE DURABILITY MEETS AFFORDABILITY

DWB14 MODEL

8" I-Beam Dump Trailer



IRONBULL

A NEW BREED OF TRAILERS



Featuring the Side Armor™ body design, our DWB dump trailer makes hauling effortless. An 8" monoframe I-beam construction makes the unit 2" shorter than our standard DTB. Built with the same rugged user in mind as our DTB model, the DWB comes in standard configurations only, but should have all the options to satisfy the needs of any serious dump user.



BOX CAPACITY (CUBIC YARDS)	
SIZE	BASE
83x12	6.2
83x14	7.2
83x16	8.3



8" Monoframe & Traditional Crossmembers



Oversized Front Toolbox

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
83	12	14,999	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,870
83	14	14,999	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,170
83	16	14,999	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,478

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

83" _____ **12' - 16'** _____ **14,999 lbs** _____ **9,521 - 10,129 lbs**
 Bed Width Bed Lengths GVWR Load Capacity

STANDARD FEATURES

- Side Armor™ Body Design
- 235/80R16 Radial Tires
- Reinforced Top Rail
- Toolbox & Front Jack Bracket
- 8" I-Beam Frame & Tongue (10 lbs/ft)
- 4" Tubing Bed Frame
- 7 Gauge Steel Flooring
- 3 x 3/16" Channel Crossmembers
- 10 Gauge 24" Steel Sides
- Standard Retractable Tarp Kit
- Weld On Diamond Plate Fenders
- 10k Drop-Leg Jack
- 2 5/16" Adjustable Auto Latching Coupler
- 7k or 8k Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Spare Tire Mount
- Slide-in Aluminum Ramps
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powder Coat & Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Four Floor Mounted 1/2" D-Rings
- DOT Approved Lighting
- Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug with Adapter
- 29" Deck Height



Side Armor™ System



7 Gauge Steel Flooring



Aluminum Ramps



3 Way Spreader Gate

WHERE DURABILITY MEETS AFFORDABILITY

* Due to supply chain, features and options may change based on availability.

DTG14 MODEL

I-Beam Gooseneck Dump Trailer



IRONBULL

A NEW BREED OF TRAILERS



Featuring the Side Armor™ body design, Iron Bull DTG model trailers are built to work. 12" I-Beam neck and risers, 14k - 21k of GVWR and 3" channel crossmembers with 16" centers. Top tier components come together with the most rugged construction on the market to deliver a dump trailer like no other.



Photo displays optional telescopic cylinder and hydraulic jacks

BOX CAPACITY (CUBIC YARDS)			
SIZE	BASE	3 FT	4 FT
83x12	6.2	9.2	12.3
83x14	7.2	10.8	14.3
83x16	8.3	12.3	16.4

83" _____ **12' - 16'** _____ **14.9k - 21k lbs** _____ **8,000 - 14,816 lbs**
 Bed Width Bed Lengths GVWR Load Capacity

STANDARD FEATURES

- Side Armor™ Body Design
- ST235/80 R16 LRE Radial Tires
- Reinforced Top Rail
- Slide-In Aluminum Ramps
- 12" I-Beam Neck and Risers
- 7 Gauge Steel Flooring
- 4" Tubing Bed Frame
- Full Length Bed Runners and Ramp Pockets
- 10 Gauge 24" Steel Sides
- Standard Retractable Tarp Kit
- Dual 10k Drop-Leg Jacks
- 2 5/16" Adjustable Auto Latching Coupler
- 7k Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Spare Tire Mount
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powder Coat & Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 1/2" D-Rings
- DOT Approved Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug with Adapter
- 32" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	SIDES	WEIGHT
83	12	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	5,092
83	14	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	5,401
83	16	14,999	2 x 7,000 lb	235/80R16 8 Hole	24"	5,798
83	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	24"	6,065

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

DTG OPTIONAL FEATURES

CODE	DESCRIPTION	CODE	DESCRIPTION
082	Tandem 8k Axles	J55	2 Speed 10k Drop-Leg Jacks
D60	Deck Over Neck	J57	12k Hydraulic Jack
S01	Rear Support Stands	S90	Solar Panel Charger
S61	3' Side Walls	R90	Wireless Remote
S62	4' Side Walls	V53	3 Stage Telescopic Cylinder
W91	Cold Weather Harness (-85°F to 221°F Rated)	T82	Mechanical Pro Tarp Kit



Side Armor™ Body Design



Aluminum Slide-In Ramps



Oversized Front Toolbox



3-Way Spreader Gate



Weld On Diamond Plate Fenders



Full Length Bed Runners

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

DDP14 MODEL

Deckover Dump with Fold Down Sides



IRONBULL
A NEW BREED OF TRAILERS



Iron Bull is happy to offer one of the best expertly made deckover dumps on the market. Our DDP offers a raised deck to accommodate 10 gauge fold down sides and a bed width of 96". Each deckover is equipped standard with 10" I-Beam frame, 3" channel crossmembers, 10 gauge smooth steel floor, 2 5/16" couplers, a 10k Drop-Leg jack and more.



BOX CAPACITY (CUBIC YARDS)	
SIZE	BASE
96x14	6.2
96x16	7.1

96" _____ **14' - 16'** _____ **14.9k - 21k lbs** _____ **8,852 - 15,488 lbs**
 Bed Width Bed Lengths GVWR Load Capacity

STANDARD FEATURES

- 10" x 12lb I-Beam Frame
- ST235/80 R16 LRE Radial Tires
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- 10 Gauge Floor
- 18" Fold-Down Sides
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 - 7k Electric Brake Axles
- Slide-in Ramps
- Cambered Spring Axles
- Three-Way Spreader Gate
- Standard Retractable Tarp Kit
- Locking Pump Box
- Built In 5 Amp Charger
- Standard Stake Pockets
- 10k Drop-Leg Jack
- Scissor Hoist with 520 Cylinder
- Four 1/2" D-Rings
- Double Acting Power Unit w/ Gravity Down
- Flow Control Valve
- Black Mod Wheels*
- DOT Approved Lifetime LED Lighting
- LED Voltage Indicator in Remote
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 35" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
96	14	14,999	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,762
96	16	14,999	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,071
96	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,423

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



96" Wide Deck, Standard Tarp



520 Scissor Hoist



Three Way Spreader Gate

DDP OPTIONAL FEATURES

CODE DESCRIPTION

- 082 Tandem 8k Axles
- S90 Solar Panel Charger
- R90 Wireless Remote
- J58 12k Hydraulic Jack
- W91 Cold Weather Harness
(-85°F to 221°F Rated)



36" Deck Height, 18" Fold Down Sides



Triple Axle Available

WHERE DURABILITY MEETS AFFORDABILITY

DDG14 MODEL

Deckover GN Dump with Fold Down Sides



IRONBULL
A NEW BREED OF TRAILERS



520 Scissor Hoist

Our DDG features an elevated deck designed to accommodate 10-gauge fold-down sides and a bed width of 96". Every deckover comes standard with a robust 10" I-Beam frame, 3-inch channel crossmembers, a 10-gauge smooth steel floor, 2 - 5/16" couplers, a 3 way spreader gate, and other premium features, ensuring a high-quality and durable solution for your hauling needs.



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE
96x14	6.2
96x16	7.1

96" — **14' - 16'** — **14.9k - 21k lbs** — **8,191 - 14,977 lbs**
 Bed Width Bed Length GVWR Load Capacity

STANDARD FEATURES

- 10" x 12lb I - Beam Frame
- ST235/80 R16 LRE Radial Tires
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- 10 Gauge Floor
- 18" Fold-Down Sides
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 - 7k Electric Brake Axles
- Standard Stake Pockets
- Cambered Spring Axles
- Three-Way Spreader Gate
- Standard Retractable Tarp Kit
- Slide-in Ramps
- 2 - 10k Drop-Leg Jack
- Scissor Hoist with 520 Cylinder
- Flow Control Valve
- Double Acting Power Unit
- Four 1/2" D-Rings
- Black Mod Wheels*
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 35" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
96	14	14,999	2 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,302
96	16	14,999	2 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,635
96	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,780

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

DDG OPTIONAL FEATURES

CODE DESCRIPTION

- 082 Tandem 8k Axles
- S90 Solar Panel Charger
- R90 Wireless Remote
- J57 2 - 12k Hydraulic Jacks
- D60 Deck Over Neck
- W91 Cold Weather Harness (-85°F to 221°F Rated)



Three Way Spreader Gate



36" Deck Height, 18" Fold Down Sides



WHERE DURABILITY MEETS AFFORDABILITY

Photos may include optional features.

DMG22 MODEL

24,900K Tandem Dual Square Bottom Dump



IRONBULL

A NEW BREED OF TRAILERS



Built after the DSG "Frankendump," this monster delivers all of the lifting power with it's 3 stage 12 ton telescopic cylinder. With a newly designed dump floor that's squared and Heavy Duty Ramps, you'll be able to haul large loads effortlessly. Packed with some serious features, you'll be the talk of the job site.

HDSS

HEAVY DUTY
SUSPENSION SYSTEM



BOX CAPACITY (CUBIC YARDS)	
SIZE	BASE
102x20	25.19

TELESCOPIC CYLINDER STANDARD!

102"

Bed Width

20'

Bed Length

24,900 lbs

GVWR

17,000 lbs

Load Capacity

STANDARD FEATURES

- 2 - 10,000 lb Premium Electric Brake Axles
- ST235/80 R16 LRE Radial Tires
- 12" 19lb I-Beam Frame
- 12" 19lb I-Beam Riser
- 12" 19lb I-Beam Neck
- 48" 10 Ga Dump Sides
- 25k 2 - 5/16" Adjustable Gooseneck Coupler
- 2 - 10k Drop Leg Jacks
- Front Full Tool Box
- 3 Stage Telescopic Cylinder (12 tons x 144")
- T80 Tarp System (Front Mount Galvanized Manual)
- Dual Mud Flaps
- Sealed Wiring Harness rated for -40°F to 158°F
- D-Rings 3 x 5/8" (8 Each)
- Spare Tire ST 235/80 R16 LRE 10 Ply
- Stake Pockets
- Flow Control Valve
- 2" x 6" Top Rail & Up Right Tubing
- Side Step Plate & Ladder
- Heavy Duty Suspension System
- Heavy Duty 16" x 96" Slide-in Ramps
- Powder Coat & Primer
- 38" Deck Height
- 7 Gauge Steel Flooring

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

OPTIONAL UPGRADE 12K AXLES FOR 24,900 GVWR



96" Long 2 x 3 1/4" Tubing Ramps



Heavy Duty Suspension System



Side Step Ladder & Barn Doors



Square Bottom Floor



12" 19 lb Frame, Neck & Risers



Locking Battery & Pump Box

WHERE DURABILITY MEETS AFFORDABILITY

DHG22 MODEL

12" I-Beam Gooseneck Dump Trailer



IRONBULL

A NEW BREED OF TRAILERS



SUPER SINGLE 10s

Iron Bull DHG dump trailer beast models are built to work hard! With a 12" I-Beam frame, neck and risers, up to 22k of GVWR and 2 - 10lb spring axles, these top tier components come together with the most rugged construction on the market to deliver a dump trailer like no other!



TELESCOPIC CYLINDER STANDARD!

83"

Bed Width

16'

Bed Length

22,000 lbs

GVWR

15,737 lbs

Load Capacity

STANDARD FEATURES

- 2 - 10,000 lb Spring Axles (2 Elec. Brakes)
- ST235/75 R17.5 LRJ Radial Tires
- 12" I-Beam Frame
- 12" I-Beam Riser
- 12" I-Beam Neck
- 36" 10 ga. Dump Sides Std.
- Gooseneck Coupler 2 5/16 Adjustable Rd. 25k
- Heavy Duty 16" x 96" Slide-In Ramps
- Diamond Plate Fenders (Weld On)
- Jack Spring Loaded Drop Leg 2-10k
- Telescopic 12 tons x 144"
- Tarp System (Front Mount)
- Standard Wiring Harness rated for -40°F to 158°F
- D-Rings 3" x 5/8" Weld On (4ech) Std.
- Spare Tire Mt. (Weld On)
- Side Step Plate
- Powder Coat & Primer
- 32" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM



Bumperpull
Available

Also Available with 4' Sides



3 Stage Telescopic Cylinder (12 tons x 144")



2 - 10k Drop Leg Jack



10k Super Single Spring Axles



3 Way Spreader Gate

WHERE DURABILITY MEETS AFFORDABILITY

DBG14 MODEL

14K Roll-Off Dump Trailer



IRONBULL
A NEW BREED OF TRAILERS



48" 10GA Dump Sides

Our DBG is our first ever roll-off dump trailer. Standard with 2 - 7k axles, 12" I-beam and a 20k winch and cable system. All backed by our industry leading Iron Clad Warranty. NOW AVAILABLE IN 20'!



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE
83x14	13
83x16	15
83x20	19

83"

Bed Width

14' - 20'

Bed Lengths

14,000 lbs

GVWR

9,330 - 9,602 lbs

Load Capacity

STANDARD FEATURES

- 2 - 7,000 lb Axles Straight (2 Elec. Brakes)
- ST235/80 R16 LRE Radial Tires
- 10" I-Beam Frame & Neck
- 12" Risers
- 2" x 4" Tube Deck
- 4" x 8" Tube Rear Bumper
- Spare Tire Mount
- 25K 2-5/16" Adjustable Coupler
- Diamond Plate Fenders (Bolt On)
- 2-10k Spring Loaded Drop-Leg Jacks
- Side Step Plate
- Standard Wiring Harness rated for -40°F to 158°F
- 20k Winch With Cable
- 60.75" Rail Width
- Flow Control Valve
- Tool Box for Winch With 2 Batteries
- Safety Chain On Deck
- Front Tool Box
- TH-520 Scissor Hoist
- 6" Oval LED Lights
- 34" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM



TH-520 Scissor Hoist



Barn Doors



Stackable Bins



Bumper Pull Option - DBB

RB BIN SPECIFICATIONS

- 2" x 4" Tube Frame
- 48" 10ga Dump Sides
- 59 3/4" x 83" (Width x Length)
- 10GA Reinforced Upper side
- 10GA Rigid Rail
- 1/4" Stacking Brackets
- 4 1/2" DIA Front & Rear Rollers
- Rear Barn Doors
- Stackable Bins
- Available in Black, Tan & Grey w/Primer Paint
- Front Mounted Tarp System
- 7" Stake Pockets
- 3" x 5/8" Weld-On D Rings

WHERE DURABILITY MEETS AFFORDABILITY

DCB14 MODEL

14k General Duty Dump



Oversized Locking Front Toolbox



Norstar now offers a tandem axle 14k general duty dump trailer. This new dump boasts 14,000 GVWR with a 516 scissor hoist and can handle most any of your hauling needs. You can't beat the durability, versatility and value of this dump trailer. Designed with a 26" deck height which makes loading and unloading easy and efficient. Perfect for your everyday tasks!



60 - 83" — **10' - 16'** — **14,000 lbs** — **10,040 - 10,370 lbs**
Bed Width Bed Lengths GVWR Load Capacity

STANDARD FEATURES

- 2 - 7,000 lb Axles Straight (2 Elec. Brakes F-Adj.)
- ST235/80 R16 LRE Radial Tires
- Slide-In Ramps 16" x 80"
- Scissor Hoist TH-516
- Tube 2" x 6" Frame
- Full Length Bed Runners
- 10 ga. Floor
- 18" 10 ga. Dump Sides
- Barn Door Gate
- 2 5/16 Adjustable 14k Auto Latching Coupler
- Diamond Plate Fenders (Weld On)
- 10k Drop Leg Jack
- Tarp System (Front Mount)
- Lighting LED (OVAL 6" & 3/4" w/ Grommet)
- Sealed Wiring Harness rated for -40°F to 158°F
- D-Rings 3" x 5/8" Weld On (4ech) Std.
- Spare Tire Mount (Weld On)
- Ranch Gray Powder Coat
- Side Wall Board Caps Optional
- Standard Tarp
- Lockable Front Toolbox
- Power Up/Down + Gravity Hydraulics
- 26" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
60	10	7,000	2 x 3,500 lb	205/75R15 LRD	2"x4" Tube	2,191
72	12	9,990	2 x 5,200 lb	225/75R15 LRD	2"x6" Tube	3,020
83	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	2"x6" Tube	3,630
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	2"x6" Tube	3,960

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



516 Scissor Hoist



Barn Door Gate



26" Deck Height & 20" 12ga Sides



16" x 80" Slide-In Ramps



WHERE DURABILITY MEETS AFFORDABILITY

DCB3K

3.5k Single Axle Dump Trailer



3500k Axles



Hydraulic Cylinder

The all-new Norstar DCB single axle dump is built tough and compact, making it the perfect solution for light to medium duty hauling. Available in multiple axle configurations—from a 3,500 lb single axle up to a 7,000 lb single axle, plus a 3,500 lb tandem axle option—this trailer delivers strength, versatility, and unbeatable value.



60"

Bed Width

10'

Bed Length

3,500 lbs

GVWR

2,023 - 2,464 lbs

Load Capacity

STANDARD FEATURES

- Forward Self-Adjusting Electric Brakes
- 12 Gauge Runners
- 2" Apex Auto Latch Coupler
- 7,000 Lb. Drop Leg Side Wind Jack
- 10 Gauge Smooth Steel Floor
- 12" x 60" Slide in Ramps
- 3 Stake Pockets Along Both Sides
- Grommet-Mounted L.E.D. Lighting
- Wiring Harness rated for -40°F to 158°F
- ST205/75 R-15 Radial Tires
- (4) 1/2" D-Rings Inside Bed
- Barn Door Gate
- J-Hooks Along sides and Rear
- Power Up/Power Down Hydraulic Pump
- 20" Tall Sides (12-Gauge)
- Lockable Toolbox w Pump and Battery
- Board Holder Cutouts

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	WEIGHT
60	10	3,500	1 x 3,500 lb	ST205/75 R15 (D)	2,053
60	10	7,000	2 x 3,500 lb	ST205/75 R15 (D)	2,191
60	10	5,200	1 x 5,200 lb	ST225/75 R15 (R)	2,119
60	10	7,000	1 x 7,000 lb	ST235/80 R16 (E)	2,193



7k Lb. Drop Leg Side Wind Jack



Barn Door Gate



12" x 60" Slide in Ramps



WHERE DURABILITY MEETS AFFORDABILITY



EQUIPMENT TRAILERS

DESIGNED FOR RELIABILITY, STRENGTH, AND EASE OF USE, MAKES THEM THE PERFECT PARTNER FOR TRANSPORTING HEAVY MACHINERY AND VEHICLES.

Built with a durable steel frame and reinforced decking, these trailers can handle even the most demanding loads. With features like secure tie-down points and easy-to-use ramps you can trust your equipment will stay safe and stable on the road. Whether for construction, farming, or landscaping, our equipment trailers provide a dependable solution for all your hauling needs.





BEST SELLERS



Pg. 30



Pg. 32



Pg. 34

ETB

6" Channel Equipment

- 16 - 26' Lengths
- Up to 14,000 lbs GVWR

EWB14

Mini Beam Hauler

- 18 - 24' Lengths
- Up to 16,000 lbs GVWR

ETG21

Equipment Gooseneck

- 20 - 44' Lengths
- Up to 21,000 lbs GVWR

ETB MODEL

6" Channel Equipment Trailer



IRONBULL

A NEW BREED OF TRAILERS



The Iron Bull ETB has 14,000 lbs of Gross Vehicle Weight Rating ensure you have enough capacity for your heaviest loads, and expert craftsmanship combined with top-tier components ensure you have an effortless tow. Countless configurations ensure you can get a fit for any job.



83"

Deck Width

16' - 26'

Deck Lengths

9.9k - 14k lbs

GVWR

9,307 - 13,284 lbs

Load Capacity

STANDARD FEATURES

- 5", 6" or 8" Channel Tongue & Frame
- ST235/80 R16 LRE Radial Tires
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Channel Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Rub Rail & Stake Pockets
- Removable Diamond Plate Fenders
- Cambered Brake Axles

- 2 Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- 10k Drop-Leg Jack (7k on 5,500 lb axles)
- 18" x 5' Slide-in Ramps
- Treated Pine 2" x 8" Floor
- 4 Standard D-Rings

- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 25" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	16	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,535
83	18	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,579
83	20	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,757
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	2,865
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	2,965
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,075
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,153
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	3,263
83	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	3,378

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

ETB OPTIONAL FEATURES

CODE DESCRIPTION

- 07ES3 Third Spring Axle (Three Brake Axles) 24'+
- 082 Tandem 8k Axles
- 02 102" Wide Deck
- D06 2' Dove Tail & Slide In Ramps
- D04 2' Dove & 5' Stand-Up Ramps
- D07 3' Dove & Rampage Ramps
- E02 Steel Floor
- G01 Fork Holders
- U50 Winch Plate 1/2"
- S02 Rear Supports (5k Swivel Jacks)
- T46 Front Toolbox
- P10 Pipe Welded Sides
- W91 Cold Weather Harness (-85°F to 221°F Rated)



Rampage Ramps



102" Wide



Steel Floor



Stand-Up Ramps

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

EWB14 MODEL

8" I-Beam Equipment Trailer



IRONBULL

A NEW BREED OF TRAILERS



8" I-BEAM



The Iron Bull EWB is available in 14,000 or 16,000 GVWR. The oversized front toolbox provides you with an organized storage solution that eliminates clutter and reduces the risk of misplaced or lost tools. Standard with an 8" I-Beam frame and tongue, this equipment hauler can get the job done!



NOW AVAILABLE IN 102" WIDE!

83" - 102" — **18' - 24'** — **14k - 16k lbs** — **9,509 - 12,383 lbs**
Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES

- Slide-in, Stand-up Ramps or Rampage Ramps
- 235/80 R16 Radial Tires
- 8" I-Beam Frame & Tongue (10 lbs/ft)
- 14,000 lb GVWR
- Tandem 7k Electric Brake Axles
- E-Z Lube Hubs
- Oversized Front Toolbox
- 10k Drop-Leg Bolt-On Jack
- 2" x 8" Treated Lumber Flooring
- Black Mod Wheels*
- Weld-On 3" D-Rings
- Removable 14Ga Diamond Plate Fenders
- 3" Structural Crossmembers on 16" Centers
- Integrated Tie-Downs on Front Bump Rail
- Weld-On 3/8" Safety Chains
- 2 5/16" Adjustable Auto Latching Coupler
- Lifetime LED Stop, Signal, Marker, & License Plate Lights
- 6 Leaf Spring Suspension
- DOT Reflective Tape
- Electric Breakaway Kit with Charger
- All Lighting DOT Approved
- Molded Sealed Harness rated for -40°F to 158°F
- Powder Coat & Primer
- 27" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,208
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,225
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,538
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,825
83	18	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	3,617
83	20	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	3,660
83	22	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	3,748
83	24	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	3,968
102	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,208
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,792
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,053
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,084
102	20	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	3,892
102	22	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	4,387
102	24	16,000	2 x 8,000 lb	215/75R17.5	8" I-Beam	4,318

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



Stand-up Ramps



8k Axles Available



Rampage Ramps



HD Stand-up Ramps



102" Wide Available



Oversized Front Toolbox

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

* Due to supply chain, features and options may change based on availability.

ETG21 MODEL

Gooseneck Equipment Trailer



IRONBULL

A NEW BREED OF TRAILERS



Add some versatility to your fleet with our 14k Gooseneck. With two 7k axles and tons of standard features, Iron Bull equipment goosenecks are a great addition to any farm or jobsite. With tons of options, meet the Jack of all trades.



Deck Heights:
6" Channel Frame - 25"
8" Channel Frame - 27"
10" Channel Frame - 29"

83" Deck Width **20' - 44'** Deck Lengths **14k - 21k lbs** GVWR **7,890 - 14,610 lbs** Load Capacity

STANDARD FEATURES

- 10" I-Beam Neck and 12" Risers
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- Rub Rail and Stake Pockets
- Removable Diamond Plate Fenders (83" wide)
- Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 Electric Brake Axles
- 5' Slide-in Ramps
- 2 -10k Drop-Leg Jacks
- Treated Pine 2"x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Locking Front Toolbox
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 25" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,760
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,770
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,020
83	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,310
83	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,691
83	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,770
83	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" Channel	5,020
83	32	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	5,156
83	34	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,375
83	36	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,600
83	38	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,900
83	40	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,400
83	42	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,620
83	44	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,845

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

ETG OPTIONAL FEATURES

CODE DESCRIPTION

- 082 Tandem 8k Axles
- 02 102" Wide Deck
- D06 2' Dove Tail & Slide In Ramps
- D08 4' Dove Tail & Slide In Ramps
- D04 2' Dove & 5' Stand-Up Ramps
- D13 4' Dove & Rampage Ramps
- E02 Steel Floor
- G01 Fork Holders
- J55 2 Speed Drop-Leg Jacks
- U52 Winch Plate 1/2" (in neck)
- P10 Pipe Welded Sides
- S02 Rear Supports (5k Swivel Jacks)
- D60 Deck Over Neck
- W91 Cold Weather Harness (-85°F to 221°F Rated)



102" Wide, Triple Axle



Rampage Ramps



7k Tandem Axles

WHERE DURABILITY MEETS AFFORDABILITY

EHB22 MODEL

22k Equipment Bumper Pull Trailer



IRONBULL
A NEW BREED OF TRAILERS



Engineered for heavy-duty hauling and rugged reliability, the EHB is your go-to solution when performance and durability are non-negotiable. This powerhouse is equipped with two 10,000 lb straight single wheel axles, including electric brakes for enhanced stopping power and control under load. The deck is finished with treated wood flooring for long-lasting durability in all weather conditions.



83" _____ **20' - 28'** _____ **22,000 lbs** _____ **14,040 - 15,100 lbs**
Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES

- 10" x 19lb I-Beam Frame
- 10" x 19lb I-Beam Neck
- Slide In Ramps Standard
- 16" Crossmembers (3" 3.5lb C-channel)
- Full Size Front Toolbox in Tongue
- Bumper Pull Adj 25k Coupler 2 5/16
- Spring Loaded Drop Leg Jack 10K
- Drive Over Diamond Plate Fenders
- Floor Treated Wood
- Front Bumper (Std.)
- Standard Wire Harness and Lights
- Wiring Harness rated for -40°F to 158°F
- D-Rings 3" x 5/8" Weld On
- ST215/75R17.5 (H)16 Ply
- Spare Tire Mount
- Powder Coat & Primer

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	20	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	4,910
83	22	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,288
83	24	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,240
83	26	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,888
83	28	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	
102	20	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	4,988
102	22	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,581
102	24	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,538
102	26	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,888
102	28	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,955

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

EHB OPTIONAL FEATURES

CODE DESCRIPTION

- 07ES3 Third Spring Axle (Three Brake Axles) 24'+
- 082 Tandem 8k Axles
- 02 102" Wide Deck
- D06 2' Dove Tail & Slide In Ramps
- D04 2' Dove & 5' Stand-Up Ramps
- D07 3' Dove & Rampage Ramps
- E02 Steel Floor
- G01 Fork Holders
- U50 Winch Plate 1/2"
- S02 Rear Supports (5k Swivel Jacks)
- T46 Front Toolbox
- W91 Cold Weather Harness (-85°F to 221°F Rated)



Rampage Ramps



Drop Leg 10k Jack



Treated Wood Floor



10k Axles

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

EHG22 MODEL

22k Equipment Gooseneck Trailer



IRONBULL
A NEW BREED OF TRAILERS



The EHG features two 10,000 lb straight axles with electric brakes, a 10" I-beam frame, and slide-in ramps. The treated wood floor, 16" crossmembers, and drive-over diamond plate fenders offer durability and ease of use. Engineered for heavy-duty hauling and rugged reliability, the EHG is your go-to solution when performance and durability are non-negotiable.



83" - 102" — **20' - 44'** — **22,000 lbs** — **13,522 - 16,600 lbs**
Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES

- 2-10,000 Lb Spring Axles (2 Elec. Brakes)
- 10" x 19lb I-Beam Frame
- 10" x 19lb I-Beam Neck
- 16" Crossmembers (3" 3.5lb C-channel)
- Front Full Tool Box Between Neck
- Gooseneck Coupler 2-5/16" Adjustable Rd. 25K
- Jack Spring Loaded Drop Leg 2-10K
- Drive Over Diamond Plate Fenders
- Treated Wood Floor
- Front Bumper (Std.)
- Standard Wire Harness and Lights
- Wiring Harness rated for -40°F to 158°F
- D-Rings 3" x 5/8" Weld On (6ech) Std.
- ST215/75R17.5 (H) 16 Ply
- Spare Tire Mount

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	20	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	
83	22	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	
83	24	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	4,121
83	26	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	
83	28	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	
102	20	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,570
102	22	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	6,018
102	24	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	6,180
102	26	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,653
102	28	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	5,900
102	30	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	6,900
102	32	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	6,338
102	44	22,000	2 x 10,000 lb	ST235/75 R17.5	10" I Beam	8,478

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

EHG OPTIONAL FEATURES

CODE	DESCRIPTION
082	Tandem 8k Axles
02	102" Wide Deck
D06	2' Dove Tail & Slide In Ramps
D04	2' Dove & 5' Stand-Up Ramps
D07	3' Dove & Rampage Ramps
E02	Steel Floor
G01	Fork Holders
U50	Winch Plate 1/2"
S02	Rear Supports (5k Swivel Jacks)
W91	Cold Weather Harness (-85°F to 221°F Rated)



Rampage Ramps



Reinforced Step



Treated Wood Floor



Gooseneck Coupler

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY



DECKOVER TRAILERS

DESIGNED FOR EASE OF USE AND DURABILITY FOR ANY LOAD. WITH THEIR OPEN-TOP DESIGN, YOU CAN EASILY ACCESS THE CARGO AREA FOR EFFORTLESS LOADING AND UNLOADING.

If you're looking for a reliable and versatile trailer to help with your hauling needs, a deckover trailer is a great option. Deckover trailers are great for hauling wide loads. The cargo area can be adjusted to accommodate different sizes and shapes of items. They are ideal for transporting oversized objects that wouldn't fit on regular trailers.



Pg. 42



Pg. 44



Pg. 46

FLG22
HD Low Pro Gooseneck

- 20 - 40' Lengths
- 23,900 lbs GVWR

FHG22
Gooseneck Hydraulic Dove

- 28 - 40' Lengths
- 23,900 lbs GVWR

FDG14
14k 10" I-Beam Gooseneck

- 20 - 32' Lengths
- 14,000 lbs GVWR



Pg. 48



Pg. 50



Pg. 52

FDP14

14k 10" I-Beam Pintle

- 16 - 32' Lengths
- 14,000 lbs GVWR

FTG14

14k 12" I-Beam Gooseneck

- 20 - 40' Lengths
- Up to 21,000 lbs GVWR

FLP22

20k 12" I-Beam Low Pro Pintle

- 20 - 40' Lengths
- 23,900 lbs GVWR

FLG22 MODEL

Gooseneck Low-Pro Equipment Trailer



IRONBULL
A NEW BREED OF TRAILERS



Iron Bull Goosenecks are some of the most rugged and longest lasting units in service today. Low-Pro, pierced frame design lowers the deck 3" providing a lower center of gravity, more stable cornering and a lower loading angle for equipment.



HDSS
HEAVY DUTY
SUSPENSION SYSTEM



102" _____ **20' - 40'** _____ **23,900 lbs** _____ **14,415 - 17,824 lbs**
Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES

- 12" I - Beam Frame and Neck (19 lbs/ft)
- 235/80R16 Radial Tires
- Low Pro Deck
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Lockable Full Neck Width Tool Box
- Rub Rail, Stake Pockets & Pipe Spools
- Standard Torque Tube & Underframe Bridge
- Heavy Duty Suspension System Standard
- 2 - 10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 25" Gooseneck Box
- 8' Slide-in Ramps
- 2 - 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Spare Tire & Mount
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 33" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	5,776
102	22	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,076
102	24	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,376
102	25	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,526
102	26	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,676
102	28	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,976
102	30	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,276
102	32	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,626
102	34	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,996
102	36	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,396
102	38	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,796
102	40	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,485

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLG22 OPTIONAL FEATURES

CODE DESCRIPTION

10HS2	2 - 10,000 lb Electric Over Hydraulic Disc Brake Axles
12ES2	2 - 12,000 lb Electric Brake Axles
12HS2	2 - 12,000 lb Electric Over Hydraulic Disc Brake Axles
15ES2	2 - 15,000 lb Electric Brake Axles
15HS2	2 - 15,000 lb Electric Over Hydraulic Disc Brake Axles
10ES3	3 - 10,000 lb Electric Brake Axles
10HS3	3 - 10,000 lb Electric Over Hydraulic Brake Axles
12ES3	3 - 12,000 lb Electric Brake Axles
12HS3	3 - 12,000 lb Electric Over Hydraulic Brake Axles
AR1/AL1	Air Ride and Air Lift Axles Available
D30	Rampage Ramps (2-40" Flip-Over Ramps w/ 5' Self Cleaning Dove)
D35	5' Self Cleaning Dove Tail with Slide-in Ramps
D31	5' Self Cleaning Dove Tail with 2 Flip-Over Ramps
D32	5' Self Cleaning Dove Tail with 3 Flip-Over Ramps

CODE DESCRIPTION

J55	2 Speed Drop-Leg Jacks
J56	2 - 12k Hydraulic Jacks
H72	6' Spread Axles
K21	12" Crossmembers (per ft)
D60	Deck Over Neck
T42	Additional Side Tool Box (ea.)
W91	Cold Weather Harness (-85°F to 221°F Rated)
T21	17.5" x 6.75" Tire Upgrade (ea.)
U30	Weld On Ratchet Track Only (per ft)
U32	Weld On Ratchets Every 5' (per ft)
U31	Weld On Track with Adjustable Ratchets Every 5'
U52	Winch Plate 1/2" (in neck)
T06	14-Ply 235/85 Tire Upgrade (ea.)



Rampage Ramps



Triple Axle Configurations



2 - 12k Electric Brake Axles

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

FHG22 MODEL

Gooseneck Hydraulic Dove Trailer



IRONBULL

A NEW BREED OF TRAILERS



The FHG, a true workhorse for your toughest jobs, stands out with its patented, revolutionary hydraulic dovetail design. We've reimagined the traditional hydraulic dovetail to offer unparalleled ease of use and reliability, ensuring you spend less time wrestling with equipment and more time getting the job done.



HDSS

HEAVY DUTY
SUSPENSION SYSTEM

102"

Deck Width

28' - 40'

Deck Lengths

23,900 lbs

GVWR

13,970 - 15,545 lbs

Load Capacity

STANDARD FEATURES

- 12" I-Beam Frame and Neck (19 lbs/ft)
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- Rub Rail, Stake Pockets & Pipe Spools
- Heavy Duty Suspension System Standard
- 2-10k Electric Brake Axles

- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- Standard Torque Tube & Pipe Bridge
- Powder Coat & Primer
- Spare Tire & Mount
- 2 - 10k Drop-Leg Jacks
- Treated Pine 2" x 8" Floor

- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- 32" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	28	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,355
102	30	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,605
102	32	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,880
102	34	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,130
102	36	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,405
102	38	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,655
102	40	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,930

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FHG22 OPTIONAL FEATURES

CODE DESCRIPTION

- 10HS2 2 - 10,000 lb Electric Over Hydraulic Disc Brake Axles
- 12ES2 2 - 12,000 lb Electric Brake Axles
- 12HS2 2 - 12,000 lb Electric Over Hydraulic Disc Brake Axles
- 15ES2 2 - 15,000 lb Electric Brake Axles
- 10ES3 3 - 10,000 lb Electric Brake Axles
- 10HS3 3 - 10,000 lb Electric Over Hydraulic Disc Brake Axles
- 12ES3 3 - 12,000 lb Electric Brake Axles
- 12HS3 3 - 12,000 lb Electric Over Hydraulic Disc Brake Axles
- AR1/AL1 Air Ride and Air Lift Axles Available
- D96 9' Hydraulic Dove Tail with Cleats on OUTSIDE ONLY
- D97 9' Hydraulic Dove Tail with Cleats FULL TAIL
- D98 9' Hydraulic Dove SELF CLEANING OUTSIDE ONLY
- D99 9' Hydraulic Dove FULL SELF CLEANING
- D95 9' Hydraulic Dove Tail Blackwood OUTSIDE ONLY
- J57 2 - 12k Hydraulic Jacks
- H72 6' Spread Axles

CODE DESCRIPTION

- K21 12" Crossmembers (per ft)
- D60 Deck Over Neck
- T42 Additional Side Tool Box (ea.)
- J55 2 Speed Drop-Leg Jacks
- W91 Cold Weather Harness (-85°F to 221°F Rated)
- T21 17.5" x 6.75" Tire Upgrade (ea.)
- U30 Weld On Ratchet Track Only (per ft)
- U32 Weld On Ratchets Every 5' (per ft)
- U31 Weld On Track with Adjustable Ratchets Every 5'
- R90 Wireless Remote
- U52 Winch Plate 1/2" (in neck)
- T06 14-Ply 235/85 Tire Upgrade (ea.)



Blackwood Floor Option



Up to 15k Axles



D98 Self Cleaning w/ Cleats Outside

WHERE DURABILITY MEETS AFFORDABILITY

FDG14 MODEL

14k 10" I-Beam Deckover Gooseneck



IRONBULL
A NEW BREED OF TRAILERS



Our FDG14 Gooseneck features a 10" I-Beam frame and neck. Our deckover goosenecks come standard with a long list of great features to get your day-to-day tasks complete. See our FTG model for 12" I-Beam frame and longer length decks.



102"
Deck Width

20' - 32'
Deck Lengths

14,000 lbs
GVWR

7,854 - 9,544 lbs
Load Capacity

STANDARD FEATURES

- 10" x 12lb I-Beam Frame
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- 6" Tubing Outer Rails
- Rub Rail, Stake Pockets & Pipe Spools
- Diamond Plate Fender Plates
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension
- Treated Pine 2" x 8" Floor
- 2 Electric Brake Axles
- Dual Stirrup Steps
- 2 - 10k Drop-Leg Jacks
- 8' Slide-in Ramps
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 34" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,456
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,672
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,968
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,230
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,868
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,040
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,960
102	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	6,146

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FDG14 OPTIONAL FEATURES

CODE	DESCRIPTION
08ES2	2 - 8,000 lb Axles (2 Elec. Brakes)
D30	5' Dove & 5' Rampage Ramps*
E02	Steel Floor
J55	2 Speed Drop-Leg Jacks
J56	2 - 12k Hydraulic Jacks
U52	Winch Plate 1/2" (in neck)
D60	Deck Over Neck



* Only available on 25' models and up



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

FDP14 MODEL

14k 10" I-Beam Pintle Equipment Trailer



IRONBULL
A NEW BREED OF TRAILERS



Our FDP14 Deckover Pintle features a 10" I-Beam frame and tongue. Our traditional deckovers come standard with 2-7k axles, 10k jacks, treated pine floor, 35" deck height, lifetime LED lighting, 8' Slide-in Ramps and more.



102"

Deck Width

16' - 32'

Deck Lengths

14,000 lbs

GVWR

8,456 - 9,912 lbs

Load Capacity

STANDARD FEATURES

- 10" I-Beam Frame and Tongue
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- Rub Rail, Stake Pockets & Pipe Spools
- 2 Electric Brake Axles
- Cambered Spring Axles
- E-Z Lube Hubs
- Multi-leaf Slipper Spring Suspension
- Full 102' Wide Deckover
- 8' Slide-in Ramps
- Dual Stirrup Steps
- 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 34" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,088
102	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,244
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,400
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,556
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,634
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,712
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,868
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,040
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,138
102	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,544

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FOPI4 OPTIONAL FEATURES

CODE	DESCRIPTION
07ES3	Third Spring Axle (Three Electric Brakes)
08ES2	2 - 8,000 lb Axles (2 Elec. Brakes)
D30	5' Dove & 5' Rampage Ramps *
E02	Steel Floor
J55	2 Speed Drop-Leg Jacks
J52	1 - 12k Hydraulic Jack
U50	Winch Plate (Floor)
E04	Rough Oak Flooring
T46	Tongue Mount Toolbox

* Only available on 25' models and up



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

FTG14 MODEL

14k 12" I-Beam Deckover Gooseneck



IRONBULL
A NEW BREED OF TRAILERS



Our FTG14 Gooseneck features a 12" I-Beam frame and neck. The heavier frame and structure allow for longer lengths and triple axle configurations in comparison to our FDG14 model that feature a 10" I-Beam frame and neck.



102"

Deck Width

20' - 40'

Deck Lengths

14k - 21k lbs

GVWR

6,922 - 8,240 lbs

Load Capacity

STANDARD FEATURES

- 12" x 14lb I-Beam Frame
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- 6" Tubing Outer Rails
- Rub Rail, Stake Pockets & Pipe Spools
- Diamond Plate Fender Plates
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension
- Treated Pine 2" x 8" Floor
- 2 Electric Brake Axles
- Dual Stirrup Steps
- 2 - 10k Drop-Leg Jacks
- 8' Slide-in Ramps
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved
- 7-Way Receiver Female Plug with Adapter
- Wiring Harness rated for -40°F to 158°F
- Powder Coat & Primer
- 38" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	4,240
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	4,710
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	5,180
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	5,760
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	5,947
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,135
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,510
102	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,885
102	34	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,078
102	36	21,000	3 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,440
102	38	21,000	3 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,815
102	40	21,000	3 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	8,189

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FTG14 OPTIONAL FEATURES

CODE DESCRIPTION

- 07ES3 Third Spring Axle (Three Electric Brakes)
- 08ES2 2 - 8,000 lb Axles (2 Elec. Brakes)
- D30 5' Dove & 5' Rampage Ramps*
- E02 Steel Floor
- J55 2 Speed Drop-Leg Jacks
- J56 2 - 12k Hydraulic Jacks
- U52 Winch Plate 1/2" (in neck)
- E04 Rough Oak Flooring
- D60 Deck Over Neck

* Only available on 25' models and up



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

FLP22 MODEL

22k Deckover Pintle Trailer



IRONBULL

A NEW BREED OF TRAILERS



HDSS

**HEAVY DUTY
SUSPENSION SYSTEM**



We designed our FLP22 Heavy Pintle with the idea of making things easier for the customer. With up to 3 15k axles, optional Rampage Ramps, 3" 60k pintle eye coupler and a self-cleaning dovetail, the FLP22 makes hauling even the heaviest machinery a smooth ride.



102"

Deck Width

20' - 40'

Deck Lengths

23,900 lbs

GVWR

15,744 - 17,630 lbs

Load Capacity

STANDARD FEATURES

- 12" I - Beam Frame (19 lbs/ft)
- 235/80R16 Radial Tires
- 60k Pintle Eye Coupler
- 3" Structural Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Rub Rail, Stake Pockets & Pipe Spools
- Standard Torque Tube & Underframe Bridge
- Heavy Duty Suspension System Standard
- 2 - 10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 8' Slide-in Ramps
- 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 33" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,270
102	22	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,456
102	24	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,550
102	25	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,656
102	26	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,770
102	28	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,856
102	30	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,056
102	32	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,256
102	34	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,456
102	36	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,656
102	38	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,856
102	40	23,900	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,156

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLP22 OPTIONAL FEATURES

CODE DESCRIPTION

10HS2	2 - 10,000 lb Electric Over Hydraulic Disc Axles
12ES2	2 - 12,000 lb Electric Brake Axles
12HS2	2 - 12,000 lb Electric Over Hydraulic Disc Brake
15ES2	2 - 15,000 lb Electric Brake Axles
15AS2	2 - 15,000 lb Air Ride Axles
10ES3	3 - 10,000 lb Electric Brake Axles
10HS3	3 - 10,000 lb Electric Over Hydraulic Brake Axles
12ES3	3 - 12,000 lb Electric Brake Axles
12HS3	3 - 12,000 lb Electric Over Hydraulic Brake Axles
D30	Rampage Ramps (2 - 40" Flip-Over Ramps w 5' Self Cleaning Dove)
D35	5' Self Cleaning Dove Tail with Slide-in Ramps
D31	5' Self Cleaning Dove Tail with 2 Flip-Over Ramps
D32	5' Self Cleaning Dove Tail with 3 Flip-Over Ramps

CODE DESCRIPTION

S01	Tube Rear Support Stands
J55	2 Speed Drop-Leg Jacks
H72	6' Spread Axles
K21	12" Crossmembers (per ft)
T42	Additional Side Tool Box (ea.)
T46	Tongue Mount Toolbox
W91	Cold Weather Harness (-85°F to 221°F Rated)
T21	17.5" x 6.75" Tire Upgrade (ea.)
U30	Weld On Ratchet Track Only (per ft)
U32	Weld On Ratchets Every 5' (per ft)
U31	Weld On Track with Adjustable Ratchets Every 5'
U50	Winch Plate (Floor)
T06	14-Ply 235/85 Tire Upgrade (ea.)



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY


FLP50 MODEL

Super HD Pintle Trailer



IRONBULL

A NEW BREED OF TRAILERS



Heavy hauling just met its match with the FLP50. With up to a 50,000 GVWR, 102" deck width, up to 3 axles, coupled with a 14" I-Beam frame and 6" Junior I-Beam Crossmembers you'll be hard-pressed to find something this beast can't carry. Loading and unloading is half the battle, and we thought about that too with a 6' self-cleaning dove tail and HD spring assist ramps std., the FLP almost makes it look easy.



HDSS HEAVY DUTY SUSPENSION SYSTEM



102" _____ **25' - 30'** _____ **50,000 lbs** _____ **40,550 - 41,005 lbs**
Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES

- 14" (26lb/ft) I-Beam Frame
- ST 215/75R17.5 LRH Radial Tires
- 2" x 8" Treated Wood Floor
- Dual 2-Speed 25k Jacks
- 6' Dove Tail with Spring Assist Ramps
- 6" Jr. I-Beam Crossmembers
- Heavy Duty Suspension System
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- ABS on Front Axle
- 1" x 4" D-Rings
- Integrated Bumper Tie-Downs
- Black Mod Wheels*
- 60k Pintle Eye Coupler
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Semi-Style Plug
- Powder Coat & Primer
- 34" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	25	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	8,995
102	26	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	9,050
102	28	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	9,246
102	30	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	9,450

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLP50 OPTIONAL FEATURES

CODE	DESCRIPTION
AR1	Air Ride
AL1	Air Ride with Lift Axle
T48	Oversized Tongue Mount Toolbox
T24	18-Ply Tire Upgrade
J56	2 - 12k Hydraulic Jacks
D27	Hydraulic Ramps



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

FXG22 MODEL

22k Tandem Dual Deckover



Tandem Duals



12" 19lb I-Beam Neck

Norstar Gooseneck Trailers deliver the same quality, usability and reliability as you've come to expect from IronBull. Decades of experience contributed to create one of the most durable trailers available on the market today. Norstar Goosenecks are built to haul and get you there and back again and again.



102"

Deck Width

25' -40'

Deck Lengths

22,000 lbs

GVWR

13,005 - 15,210 lbs

Load Capacity

STANDARD FEATURES

- 2 - 10,000 Lb Electric Brake Axles
- ST235/80 R16 LRE 10 Ply. (Dual)
- 12" 19lb I-Beam Frame & Neck
- 6" Channel Side Rail
- 16" Crossmembers (3" 3.5lb C-channel)
- 5 1/2" Torque Tube
- 102" X 5' Self Cleaning Dove Tail w/ Rampage Ramps
- Under Frame Bridge
- Front Tool Box
- Rub Rails w/Stake Pockets & Pipe Spools
- 2-5/16" Gooseneck Coupler Adjustable Rd. 25K
- Treated Wood Floor
- Spring Loaded Drop Leg Jack 2-10K
- D-Rings 3" x 5/8" Weld On (4 ea)
- Spare Tire ST235/80 R16 LRE 10 Ply. (Dual)
- Mud Flaps with Norstar Logo (Dual Tires)
- Standard Wire Harness rated for -40°F to 158°F
- New Diamond Plate Steps
- Powder Coat & Primer
- One Year Warranty
- 32" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	25	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	6,790
102	26	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	6,962
102	28	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	7,297
102	30	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	7,606
102	32	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	7,893
102	34	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	8,179
102	36	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	8,400
102	38	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	8,708
102	40	22,000	2 x 10,000 lb	ST 235/80R16 LRE	12" (19lb/ft)	8,995

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



Front Toolbox Between Neck



Spare Tire (Standard On Tandem Duals)



Rampage Ramps



LED Lighting

WHERE DURABILITY MEETS AFFORDABILITY



TILT TRAILERS

DESIGNED FOR HAULING VEHICLES WITH LOW GROUND CLEARANCE FOR NO HASSLE LOADING AND UNLOADING.

Go full tilt with your trailering! Our quality craftsmanship and extended range of optional features makes our tilt trailers the best on the market. IronBull gravity tilt decks offer a great alternative to ramps, steep loading angles and possible hang up points of traditional flat deck units.





BEST SELLERS



Pg. 60

TWB14

Mini-Beam Tilt

- 20 - 24' Lengths
- 14,000 lbs GVWR



Pg. 62

TLB14

Low Pro Bumper Tilt

- 16 - 26' Lengths
- 14,000 lbs GVWR



Pg. 64

TDP14

Deckover Pintle Tilt

- 22 - 30' Lengths
- 14,000 lbs GVWR

TWB14 MODEL

Mini-Beam Tilt Trailer



IRONBULL
A NEW BREED OF TRAILERS



We have a new Bull on the market! It's our 8" I-Beam 102 wide tilt equipment hauler. Iron Bull Gravity Tilt Decks offer a great alternative to ramps, steep loading angles and possible hang up points of traditional flat deck units. 14,000 lbs of gross vehicle weight rating ensures you have enough capacity for your heaviest loads, as well as expert craftsmanship combined with top-tier components will ensure you have an effortless tow. It's a great fit for work and play.



MINI BEAM TILT



83" Deck Width **20' - 24'** Deck Lengths **14,000 lbs** GVWR **9,447 - 9,778 lbs** Load Capacity

STANDARD FEATURES

- 8" 10 lb I Beam Frame
- 235/80 R16 Radial Tires
- 14 Degree Tilt Angles
- 14k GVWR
- 4,400 lbs est Weight (20') Gravity Tilt
- Oversized Front Toolbox
- 2 - 7,000 lb Torsion Axles
- Cambered Torsion Axles
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- Knife Edge Tail (1/4" Diamond Plate)
- Removable Diamond Plate Fenders
- Rub Rail and Stake Pockets
- 10k Drop-Leg Jack
- 4 Standard 3" D-Rings
- E-Z Lube Hubs
- Black Mod Wheels*
- 3" x 10" Cylinder with 1.5" Shaft
- Multi-Leaf Slipper Spring Suspension
- Treated Pine Floor
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 23" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM



GO FULL TILT!
WITH TOP-TIER CRAFTSMANSHIP, THIS
NEW TILT BULL GIVES THE ABILITY TO
HANDLE HEAVY LOADS EFFORTLESSLY

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	STATIONARY	WEIGHT
83"	20	14,000	2 X 7,000 lb	235/80R16 8 Hole	4'	4,222
83"	22	14,000	2 X 7,000 lb	235/80R16 8 Hole	6'	4,376
83"	24	14,000	2 X 7,000 lb	235/80R16 8 Hole	8'	4,553

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TWB OPTIONAL
FEATURES

CODE	DESCRIPTION
E02	Steel Floor
08ES2	Tandem 8k Axles
T06	14-Ply 235/85 Tire Upgrade (ea.)
02	102" Wide Deck (83" Between Fenders)
K21	12" Crossmembers
E03	Blackwood Floor
W91	Cold Weather Harness (-85°F to 221°F Rated)
U50	Winch Plate (Floor)



83" or 102" Wide



Updated Latch



WHERE DURABILITY MEETS AFFORDABILITY

TLB14 MODEL

Low-Pro Tilt Trailer



IRONBULL

A NEW BREED OF TRAILERS



Gooseneck Available

Our 83" wide 14k bumper pull is by far our most popular tilt model. With two 7k axles, tons of standard features and the option between gravity and power tilt, this model is a perfect fit for the contractor or weekend warrior.



22" DECK HEIGHT & 11 DEGREE LOADING ANGLE!



83"

Deck Width

16' - 26'

Deck Lengths

9.9k - 14k lbs

GVWR

9,344 - 10,285 lbs

Load Capacity

STANDARD FEATURES

- 6" Channel Tongue (8.2 lbs/ft)
- 235/80 R16 Radial Tires
- 2 - 5200 or 7000 lb Torsion Axles
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- 11 Degree Loading Angle
- Knife Edge Tail (1/4" Diamond Plate)
- Removable Diamond Plate Fenders

- Rub Rail and Stake Pockets
- 10k Drop-Leg Jack
- 4 Standard 3" D-Rings
- E-Z Lube Hubs
- Black Mod Wheels*
- 3" x 10" Cylinder with 1.5" Shaft
- Cambered Torsion Axles
- Multi-leaf Slipper Spring Suspension

- 2" x 8" Treated Pine Floor
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- 20" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	STATIONARY	WEIGHT
83	16	9,990	2 x 5,200 lb	225/75R16 6 Hole	0' (Power Tilt Only)	2,444
83	18	9,990	2 x 5,200 lb	225/75R16 6 Hole	2'	2,934
83	20	9,990	2 x 5,200 lb	225/75R16 6 Hole	4'	3,165
83	16	14,000	2 x 7,000 lb	225/75R16 6 Hole	0'	3,715
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	2'	3,869
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	4'	3,957
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6'	4,112
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8'	4,354
83	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10'	4,656

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TLB OPTIONAL FEATURES

CODE DESCRIPTION


- V58 Power Up/Power Down
- A36 Full Deck Tilt (Power Included)
- 02 102" Wide Deck (83" Between Fenders)
- 07ET3 Third Torsion Axle (Three Electric Brakes)
- 08ES2 Tandem 8k Axles
- K21 12" Crossmembers
- E02 Steel Floor
- E03 Blackwood Floor
- T46 Front Tool Box (Gravity Only)
- T06 14-Ply 235/85 Tire Upgrade (ea.)
- U50 Winch Plate (Floor)
- W91 Cold Weather Harness (-85°F to 221°F Rated)



Knife Edge Tail



Full Power Tilt

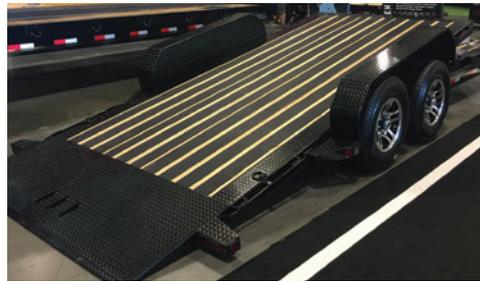

Blackwood Flooring



102" Wide Deck Available



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

TDP14 MODEL

14k Deckover Tilt Pintle Trailer



IRONBULL

A NEW BREED OF TRAILERS



ALSO AVAILABLE IN GOOSENECK

Our TDP14 Deckover features an 8" I-Beam tongue and frame, 14k GVWR and dual hydraulic cylinders with optional scissor. The TDP is built to deliver maximum performance and versatility.



102"
Deck Width

22' - 30'
Deck Lengths

14,000 lbs
GVWR

8,320 - 9,700 lbs
Load Capacity

STANDARD FEATURES

- 8" I-Beam Frame (10 lbs/ft)
- 235/80R16 Radial Tires
- 2 5/16" Adjustable Auto Latching Coupler
- 3" Structural Crossmembers
- 4" Tube Frame Runners
- Rub Rail, Stake Pockets & Pipe Spools
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension

- E-Z Lube Hubs
- 2 Electric Brake Axles
- 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Lifetime LED Lighting
- All Lighting DOT Approved

- Molded Sealed Harness with Resistors
- Wiring Harness rated for -40°F to 158°F
- 7-Way Receiver Female Plug with Adapter
- Powder Coat & Primer
- Dual Cylinder Lift
- 33" Deck Height

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS


WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,300
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,800
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,070
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,430
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,680

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TOP14 OPTIONAL FEATURES

CODE	DESCRIPTION
07ES3	Third Spring Axle (Three Electric Brakes)
08ES2	Tandem 8k Axles
J58	1 - 12k Hydraulic Jack
E02	Steel Floor
E03	Blackwood Floor
K21	12" Crossmembers
E01	3" Adjustable Pintle Ring
T01	Weld on Spare Tire Mount
R01	Winch Plate 1/2" (in floor)
V50	Scissor Hoist TH-516
W91	Cold Weather Harness (-85°F to 221°F Rated)

102" FULL DECK WIDTH

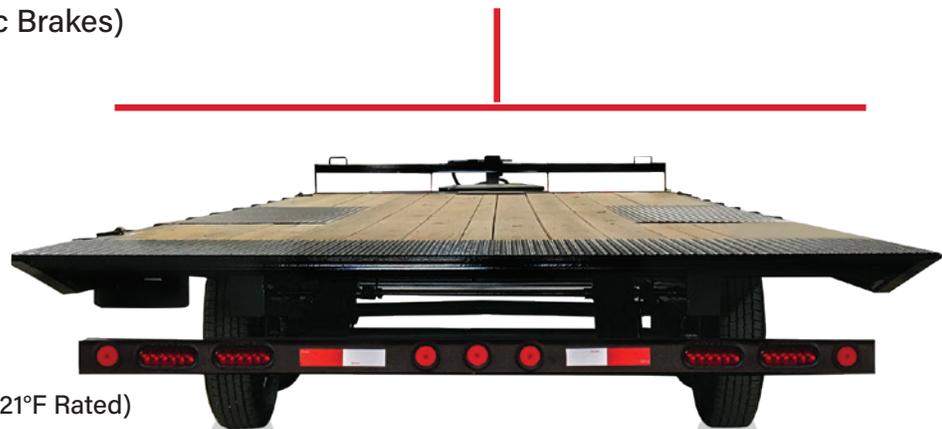

Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

TSB07 MODEL

7k Gravity Tilt Bumper Pull Trailer



IRONBULL

A NEW BREED OF TRAILERS



A small and compact bumper pull tilt trailer that boasts a 7,000 GVWR, perfect for loading small machinery and equipment! The TSB features a 7,000 lb Tors Axle with electric brakes, gravity tilt, a 5" channel frame and tilt deck, and 20" crossmembers. It includes an adjustable 10k bumper pull coupler (2" ball), a 7k drop leg jack, a smooth single fender that is removable with a bolt-on design, and treated wood flooring.



80"

Deck Width

12'

Deck Length

7,000 lbs

GVWR

5,082 lbs

Load Capacity

STANDARD FEATURES

- 1 - 7,000 lb Tors Axles (UP) (Elec Brakes)
- Gravity Tilt
- 5" Channel Frame & Tilt Deck
- 20" Crossmembers (2.5" x 3/16 Angle)
- Adj 10k Bumper Pull Coupler, 2" Ball
- 7k Drop Leg Jack
- Smooth Single Fender (Removable Bolt On)
- Treated Wood Floor
- Sealed Wire Harness
- Wiring Harness rated for -40°F to 158°F
- ST235/80 R16 LRE 10 Ply Radial

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
80	12	7,000	1 x 7,000 lb	ST235/80 R16	5" Channel	1918

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



2" Ball Bumper Pull Coupler



Secure Gravity Lock



7k Axle with Electric Brakes



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

TRB MODEL

7k-10k Bumper Pull Tilt Trailer



IRONBULL

A NEW BREED OF TRAILERS



The Ironbull TRB stands in a class of its own as the premier offering in the Ironbull lineup, blending lightweight agility with the industrial-strength DNA you expect. Engineered for maximum payload capacity without sacrificing durability, the TRB features a robust 2x5" tube tongue and frame and a full deck gravity tilt system. Complete with 6K swivel 360 D-rings and a comprehensive LED lighting package, the TRB is the ultimate lightweight powerhouse for those who refuse to compromise on performance.



83"

Deck Width

20' - 22'

Deck Lengths

7k-10k lbs

GVWR

3,861 - 6,284 lbs

Load Capacity

STANDARD FEATURES

- 2 x 3,500 Lb Axles (2 Elec Brakes)
- 2x5 Tube Tongue & Frame
- 2x5 Full Deck Tilt
- 16" Crossmembers (3" 3.5lb C-channel)
- Bumper Pull Coupler 2-5/16" Adjustable 6 Holes
- Standard Jack Drop Leg 1-7K
- Floor Steel Diamond Plate (per ft)
- Gravity Tilt System
- Trim Around Upper Trailer Deck
- 14GA Cover Walkways Front & Rear
- Smooth Tandem Fender
- LED Lighting
- Standard Wire Harness rated for -40°F to 158°F
- 6K Swivel 360 D-Rings (Bolt-On)
- ST205/75 R15 (D) 8PLY

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM


BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
83	20	7,000	2 x 3,500 lb	ST205/75 R15	2" x 5" Tube	3,139
83	20	10,000	2 x 5,200 lb	ST225/75 R15	2" x 5" Tube	3,199
83	22	7,000	2 x 3,500 lb	ST205/75 R15	2" x 5" Tube	3,656
83	22	10,000	2 x 5,200 lb	ST225/75 R15	2" x 5" Tube	3,716


*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TRB OPTIONAL FEATURES

CODE	DESCRIPTION
T46	Front Tool Box
U50	Winch Plate

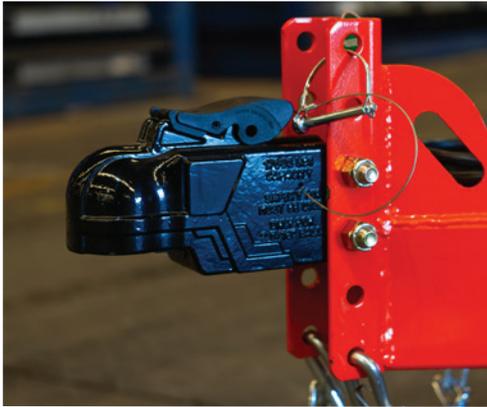

2" Ball Bumper Pull Coupler

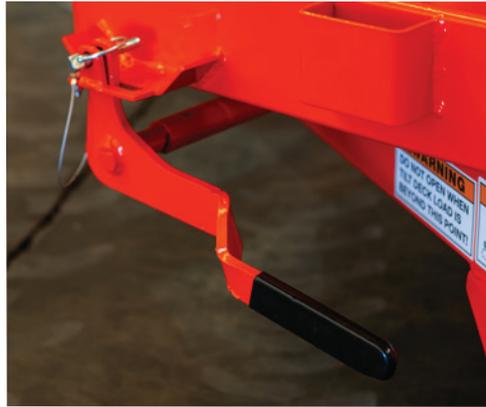

Secure Gravity Lock



2 x 3.5k Axles w/ Electric Brakes



7K Drop Leg Jack



Side Step



LED Lighting



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY

THG22 MODEL

22k 12" I-Beam Gooseneck Tilt Trailer



IRONBULL

A NEW BREED OF TRAILERS



The Ironbull THG Tilt Trailer is built for heavy-duty performance with super single 10K axles and rugged 16" crossmembers for unmatched strength and durability. Its hydraulic tilt deck allows for easy loading and unloading, making it ideal for transporting equipment with speed and efficiency. Whether on the jobsite or the highway, the THG delivers reliable hauling power with a tough, low-maintenance design.



102" Deck Width **30' - 40'** Deck Length **22,000 lbs** GVWR **12,620 - 14,220 lbs** Load Capacity

STANDARD FEATURES

- ET2 - 2 - 10,000 Lb Tors Axles (2 Elec. Brakes)
- 12" 19LB I-Beam Frame
- 12" 19LB I-Beam Neck
- 10" 19LB I-Beam Deck Frame
- 16" Crossmembers (3" 3.5lb C-channel)
- Gooseneck Coupler 2 5/16 Adjustable Rd. 25k
- Floor Treated Wood
- Scissor Hoist TH-520
- Jack Spring Loaded Drop Leg 2-10K
- LED Lighting
- Standard Wire Harness rated for -40°F to 158°F
- D-Rings 3" X 5/8" Weld On (4ech) Std.
- Spare Tire Mt.
- Standard 2 Front Steps

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	30	22,000	2 x 10,000 lb	ST235/75 R17.5 LRJ 18Ply	12" I-Beam	7,780
102	40	22,000	2 x 10,000 lb	ST235/75 R17.5 LRJ 18Ply	12" I-Beam	9,380

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

THG OPTIONAL FEATURES

CODE	DESCRIPTION
E02	Steel Floor (per ft)
E03	Blackwood Floor
K21	12" Crossmembers (per ft)
U50	Winch Plate 1/2" (in floor)
W91	Cold Weather Harness (-85°F to 221°F Rated)



102" FULL DECK WIDTH



2 x 10k Axles w/ Electric Brakes



Front Steps



2x 10k Drop Leg Jacks



Photos may include optional features.

WHERE DURABILITY MEETS AFFORDABILITY



UTILITY TRAILERS

WITH THEIR STURDY CONSTRUCTION AND AMPLE STORAGE SPACE, UTILITY TRAILERS ARE VALUABLE FOR HOMEOWNERS, LANDSCAPERS, AND SMALL BUSINESS OWNERS.

We are the leading manufacturer of high-quality utility trailers designed to meet the unique needs of our customers. A utility trailer can be a game-changer when completing tasks and transporting cargo. With us, you can rest assured that you're getting a high-quality, durable, and versatile trailer that will provide years of reliable use.





Pg. 64

UTB03

Single Axle Utility

- 12 - 14' Lengths
- 3,500 GVWR



Pg. 65

UTB07

Tandem Axle Utility

- 14 - 18' Lengths
- 7,000 GVWR

UTB03 MODEL

Single Axle Utility Trailer



IRONBULL
A NEW BREED OF TRAILERS

STANDARD FEATURES

- 1 - 3500 lb Axle (Idler)
- ST205/75 R15 (D) 8Ply
- Channel 4" x 4.5 lbs Frame & Tongue
- Angle 2.5" x 2.5" X 3/16" Crossmembers
- Tube 2" x 4" x 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" x 2" x 1/8")
- 4' Fold-In Gate
- 4" Tail Gate w/ Springs (Tube 2" x 2" X 1/8" & Angle 2 1/2" x 2 1/2" x 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- 2" A-Frame Coupler
- Jack Swivel Topwind 5k
- Teardrop Single Fender
- Treated Wood Floor
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Wiring Harness rated for -40°F to 158°F
- Stake Pockets
- Tie Downs
- Spare Tire Mount
- Grey
- 22" Deck Height

Taking the field by storm is the Iron Bull UTB. Our beefed up utility trailer packs a serious punch and is available in single or tandem axle configurations with the same heavy duty build that you have come to expect to get from Iron Bull.

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	WEIGHT
83	12	3,500	1 x 3,500 lb	ST205/75R-15 LRD	1,389
83	14	3,500	1 x 3,500 lb	ST205/75R-15 LRD	1,609

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS




83"
Deck Width

12' - 14'
Deck Lengths

3,500 lbs
GVWR

2,000 lbs
Load Capacity

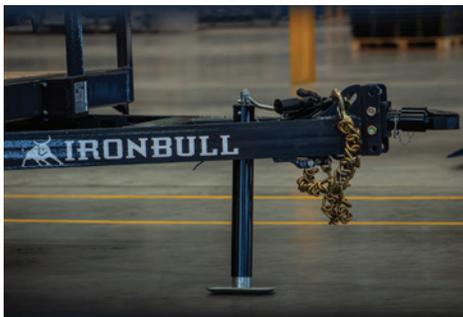

Adjustable Coupler



4' Fold-In Gate



Fully LED Lighting With Fold-In Gate

5500 FM 38N, BROOKSTON, TX 75421 • NORSTARCOMPANY.COM

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	WEIGHT
83	14	7,000	2 x 3,500 lb	ST205/75R-15 LRD	1,817
83	16	7,000	2 x 3,500 lb	ST205/75R-15 LRD	1,927
83	18	7,000	2 x 3,500 lb	ST205/75R-15 LRD	2,059

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



83" _____ **14' - 18'** _____ **7,000 lbs** _____ **4,941 - 5,183 lbs**
 Deck Width _____ Deck Lengths _____ GVWR _____ Load Capacity

STANDARD FEATURES


- 2 - 3500 Lb Axles (1 Elec Brake & 1 Idler)
- ST205/75 R15 (D) 8Ply
- Channel 4" x 4.5LBS Frame & Tongue
- Angle 2.5" x 2.5" x 3/16" Crossmembers
- Tube 2" x 4" x 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" x 2" x 1/8")
- 4' Fold-In Gate
- Treated Wood Floor
- 4" Tail Gate w/ Springs (Tube 2" x 2" x 1/8" & Angle 2 1/2" x 2 1/2" x 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- Bumper Pull Adj 7k Coupler
- Jack Swivel Topwind 5k
- Teardrop Tandem Fender
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Wiring Harness rated for -40°F to 158°F
- Stake Pockets
- Tie Downs
- Spare Tire Mount
- Grey
- Available 2nd Brake Axle
- 22" Deck Height



2" x 2" Top Tube Rail



Tear Drop Tandem Fender

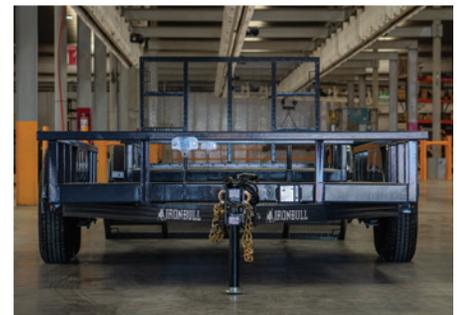

C-Formed Front Bumper

WHERE DURABILITY MEETS AFFORDABILITY



IRONBULL®



**WHERE DURABILITY
MEETS AFFORDABILITY™**

V.01.26

5500 FM 38N, BROOKSTON, TX 75421

NORSTARCOMPANY.COM

903-784-8900